


The Ultraflat 54 floor drain DN 50, enclWPM, Des grating

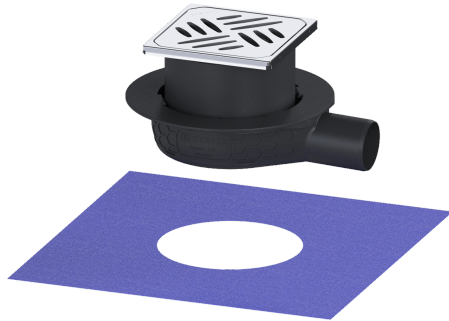

Article information

Item no.: 44750.62
GTIN: 4026092080887
Price group: 10

Advantages

- including removable odour trap in the upper section
- Low installation depth
- Scientifically confirmed sound insulation effect

Description

The Ultraflat 54 floor drain is suitable for indoor floor drainage. The polymer drain is equipped with a removable odour trap in the upper section. Open seepage water opening, no flooding of the waterproofing level in the event of build-up.

| | |
|--|---|
| Variant | |
| System: | 125 |
| Seepage opening: | optional |
| Waterproofing layer on the drain body: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W2-I |
| Sealing water height: | 22 mm |
| General characteristics | |
| Nominal size (DN): | 50 |
| Outer diameter (OD): | 50 mm |
| Odour trap: | included |
| Sustainable: | through the use of recycled material |
| Dimensions | |
| Vertical adjustment: | 63 - 116 mm |
| Net weight: | 0,85 kg |
| Gross weight: | 1 kg |
| Type of height adjustability: | vertically adjustable upper section |
| Length: | 246 mm |
| Width: | 200 mm |
| Height: | 54 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

| | |
|-------------------------|-----------------------|
| Tank/drain body | |
| Number of outlets: | 1 |
| Material of drain body: | ABS |
| Coverage features | |
| Type of cover: | Design cover |
| Cover material: | Stainless steel 14301 |
| Colour of cover: | silver |
| Width of cover: | 120 mm |
| Height of cover: | 16 mm |
| Length of cover: | 120 mm |
| Frame material: | Stainless steel 14301 |
| Locking: | unlocked |
| Load class: | L 15 (EN 1253-1) |
| Grating design: | Kessel |
| Rim width: | 132 mm |
| Rim length: | 132 mm |
| Shape of upper section: | square |
| Upper section material: | ABS |