



Variofix upper section Kessel des cover, 316SST, Lock&Lift, L15

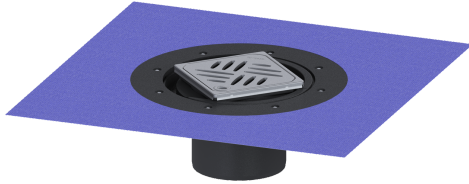

Article information

Item no.: 48204
GTIN: 4026092066522
Price group: 10

Advantages

- Different covers selectable
- Including waterproofing membrane

Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

Variant

System:

Seal:

Waterproofing layer on the upper section:

Water exposure class in accordance to DIN 18534-1 (up to and including):

General characteristics

Sustainable:

125

Lip seal

Enclosed sealing collar to be glued (bd) according to DIN 18534

W3-I

through the use of recycled material

Dimensions

Vertical adjustment:

Net weight:

Gross weight:

Diameter:

Type of height adjustability:

Height:

Packaging dimension:

Packaging dimension:

Packaging dimension:

10 - 23 mm

1,5 kg

1,77 kg

312 mm

vertically adjustable upper section

120 mm

length

width

height

Coverage features

Type of cover:

Cover material:

Colour of cover:

Min. flooring height:

Frame material:

Locking:

Load class:

Grating design:

Slip resistance class:

Rim width:

Rim length:

Max. flooring height:

Upper section:

Shape of upper section:

Upper section material:

Design cover

316 stainless steel

silver

10 mm

316 stainless steel

Lock & Lift

L 15 (EN 1253-1)

Kessel

R9 according to DIN 51130; C according to DIN 51097

132 mm

132 mm

24 mm

adjustable in three dimensions

square

ABS