


Slotted Channel Ferrofix glued flange H: 6mm, 17x2000mm, middle

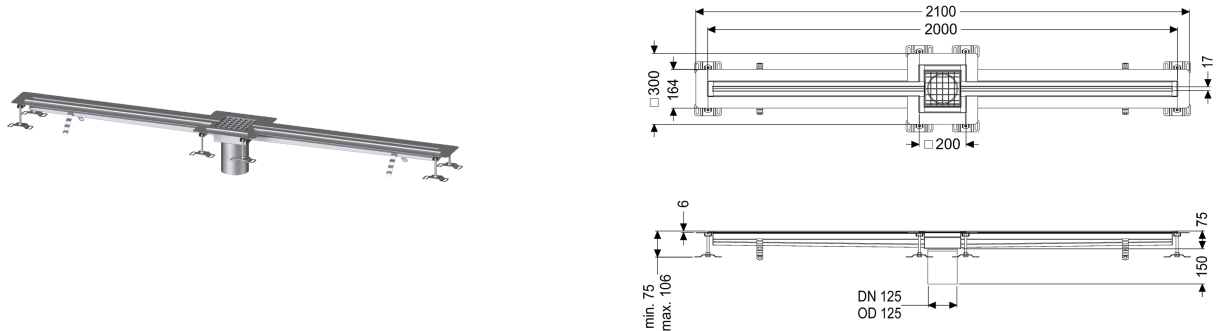

Article information

Item no.: 6202200
 GTIN: 4026092099629
 Price group: 80

Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Ferrofix slotted channel made of stainless steel with a material thickness of 1.5 mm (pickled in the immersion bath) is equipped with ground crosspieces, longitudinal and transverse gradients, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for thin-layered floorings (e.g. epoxy resin) and has an all-round adhesive rim (6 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is also suitable for connecting waterproofing.

Variant

Waterproofing layer on the upper section:
 Position of sink trap:

Adhesive flange (suitable for moisture barriers)
 central

General characteristics

Material:	Stainless steel 14301
Nominal size (DN):	125
Outer diameter (OD):	125 mm
Glued flange height:	6 mm

Dimensions

Net weight:	12 kg
Gross weight:	12 kg
Length:	2000 mm
Width:	17 mm
Height:	75 mm

Coverage features

Type of cover:

Slotted cover

Colour of cover:

silver

Width of cover:

200 mm

Length of cover:

200 mm

Locking:

placed

Load class:

L 15 (EN 1253-1)

Slip resistance class:

R12 according to DIN 51130; C according to DIN 51097

Slot width:

17 mm